



RE10N

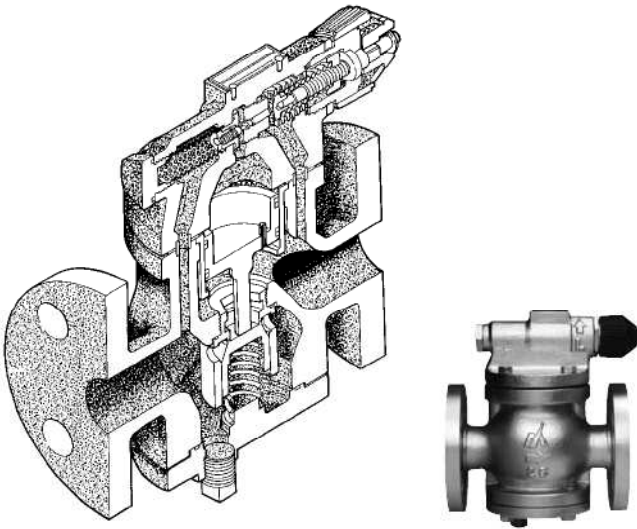



Dimensions

1. Pilot operated Pressure Reducing Valve.
 2. Very compact.
 3. Easy adjustment by turning the plastic handle.
 4. Accurate operation by using the stainless steel micro-bellows.
- Suitable for:** All low and medium capacity steam pressure reducing applications.

Dimensions

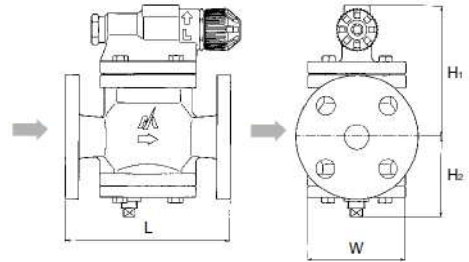

Capacity Charts

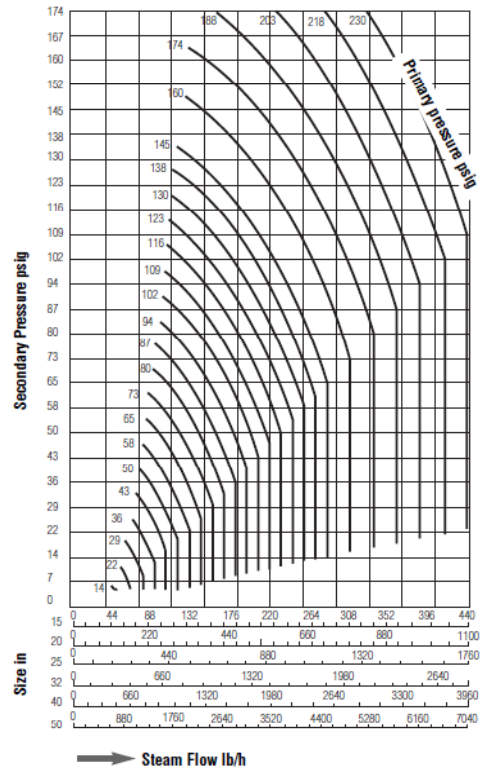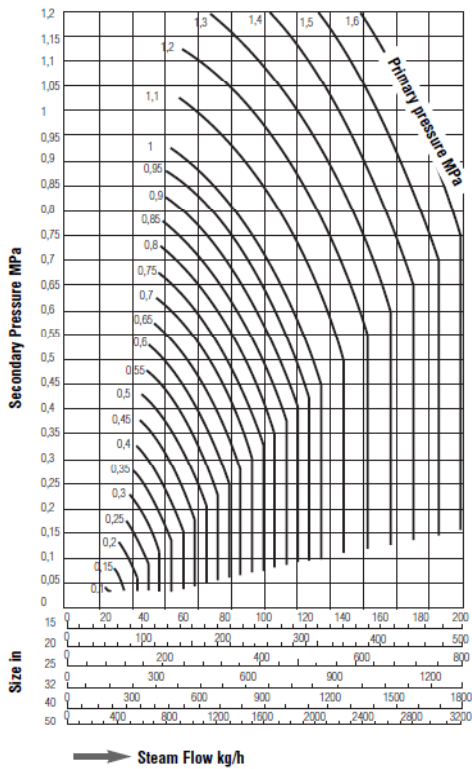

Model	Connect.	Size (in)	Operating Pressure (Primary)		Secondary Pressure		Max. Red. Pressure Ratio	Max. Operat. Temperature °C	Max. Operat. Temperature °F	Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	MPa	psig				L	H1	H2	W	L	H1	H2	W		kg	lb
RE10N	Flanged	1/2"	0.1-1.6	14.5-230	0.03-1.2	4.4-174	20 : 1	220	428	160	133	80	100	6.3	5.2	3.1	3.9	Ductile Cast Iron FCD 450	7,0	15,4
		170								6,7				7,4					16,3	
		200								154	103	130	7,9	6,1	4,1	5,1	14,1		31,0	
		220								8,7	14,3	31,5								
																15,5	34,1			